

Technical data sheet

Screw plug, PG thread

Item number: 2090626



Metal screw plug with integrated sealing ring To close unused threaded openings, e.g. in housings or junction and branch boxes. With PG thread to DIN EN 46320 or DIN 40430. Protection class IP 68 (5 bar/1 h).



Brass



Nickel-plated

Master data

Item number	2090626
Type	168 MS PG36 + O
Description 1	Screw plug
Description 2	with O ring
Manufacturer	OBO
Dimension	Ø50x15
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	50
Unit of quantity	Piece
Weight	0.09 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0044 kg CO2e / 1 Piece


Technical data sheet

Screw plug, PG thread

Item number: 2090626



Dimensions

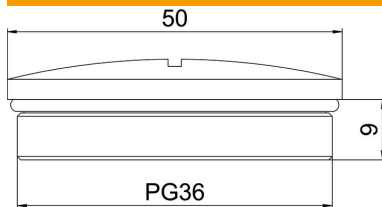

Length	50 mm
Width	50 mm
Height	15 mm
Dimension D	50 mm
Dimension L	9 mm

Technical data

explosion-proof	no
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 36
Thread type	PG
Nominal thread size metric/PG	36
Thread increase	1.59 mm
Fibre-glass reinforced	no
Halogen-free	yes
Impact-resistant	no
Protection rating	IP68