

# Technical data sheet

## Set of Quick clips and Quick pipe pipes

Item number: 2154544



Set consisting of Quick pipe electrical installation pipes and Quick clip surface-mounted clips. For surface-mounted routing of cables in interiors and protected outdoor areas. Universal fastening on wall and ceiling. Comprises 20 m of pipe each of 2 metres in length and 60 Quick clips. Can be used in a temperature range of -25 to +60 °C.



**PVC** Polyvinylchloride

### Master data

|                     |                             |
|---------------------|-----------------------------|
| Item number         | 2154544                     |
| Type                | 2954 M32 LGR                |
| Description 1       | Quick-Pipe set              |
| Description 2       | Quick trunking + Quick clip |
| Manufacturer        | OBO                         |
| Dimension           | M32                         |
| Colour              | Light grey; RAL 7035        |
| Material            | Polyvinylchloride           |
| Smallest sales unit | 1                           |
| Unit of quantity    | Piece                       |
| Weight              | 479 kg                      |
| Weight unit         | kg/100 pc.                  |


# Technical data sheet

## Set of Quick clips and Quick pipe pipes

Item number: 2154544



### Dimensions

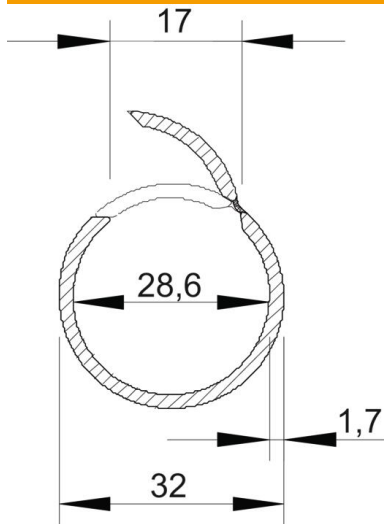

|                  |        |
|------------------|--------|
| Dimension C      | 17 mm  |
| Dimension D      | 32 mm  |
| Dimension m (mm) | 28,6   |
| Dimension t      | 1.7 mm |

### Technical data

|                                   |        |
|-----------------------------------|--------|
| Surface-mounted                   | yes    |
| Flame-resistant version           | no     |
| Concrete installation             | yes    |
| Size                              | M32    |
| Halogen-free                      | no     |
| Installation on wood              | yes    |
| Installation in the earth         | no     |
| Installation outdoors             | no     |
| Classification code               | 0      |
| Machines and system installation  | yes    |
| With sleeve                       | no     |
| Permitted temperature range, max. | 60 °C  |
| Permitted temperature range, min. | -25 °C |
| Underfloor installation (screed)  | no     |
| Concealed                         | no     |