


# Technical data sheet

End piece ATR EMB5422

Item number: 6131038



End piece as a fitting for the ATRIANE mini trunking.

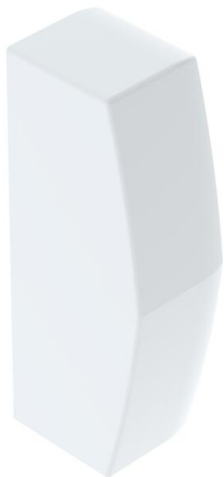

**ASA** Acrylnitrile-styrene-acrylester

| Master data                        |                                 |  |
|------------------------------------|---------------------------------|--|
| Item number                        | 6131038                         |  |
| Type                               | ATR EMB5422 blc                 |  |
| Description 1                      | End piece                       |  |
| Description 2                      | ATRIANE 22x54 9010              |  |
| Manufacturer                       | OBO                             |  |
| Dimension                          | 57,8x16x23,1                    |  |
| Colour                             | Pure white; RAL 9010            |  |
| Material                           | Acrylnitrile-styrene-acrylester |  |
| Smallest sales unit                | 5                               |  |
| Unit of quantity                   | Piece                           |  |
| Weight                             | 0.42 kg                         |  |
| Weight unit                        | kg/100 pc.                      |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0264 kg CO2e / 1 Piece        |  |

| Dimensions |        |       |
|------------|--------|-------|
|            | Length | 58 mm |
|            | Width  | 16 mm |
|            | Height | 23 mm |
|            |        |       |

# Technical data sheet

End piece ATR EMB5422

Item number: 6131038



## Technical data

|                                   |            |
|-----------------------------------|------------|
| Version for                       | Left/right |
| Fastening type                    | Lockable   |
| Maintain electrical functions     | no         |
| Halogen-free                      | no         |
| Protection rating                 | IP40       |
| Protective film                   | no         |
| Protection rating IK code         | IK07.      |
| Permitted temperature range, max. | 60 °C      |
| Permitted temperature range, min. | 5 °C       |