

# Technical data sheet

Device installation trunking Rapid 80, trunking width 170,  
trunking height 70, asymmetrical  
Item number: 6279400



Device installation trunking Without base perforation suitable for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the device installation trunking are laminated. The cover must be ordered separately. We recommend the use of the duct clamp.

#### Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Alu Aluminium

## Master data


|                                    |                              |
|------------------------------------|------------------------------|
| Item number                        | 6279400                      |
| Type                               | GA-A70170RW                  |
| Description 1                      | Device installation trunking |
| Description 2                      | asymmetrical                 |
| Manufacturer                       | OBO                          |
| Dimension                          | 70x170x2000                  |
| Colour                             | Pure white; RAL 9010         |
| Material                           | Aluminium                    |
| Smallest sales unit                | 2                            |
| Unit of quantity                   | Metre                        |
| Weight                             | 262.9 kg                     |
| Weight unit                        | kg/100 m                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 33,8747 kg CO2e / 1 Meter    |

# Technical data sheet

Device installation trunking Rapid 80, trunking width 170,  
trunking height 70, asymmetrical  
Item number: 6279400



## Dimensions

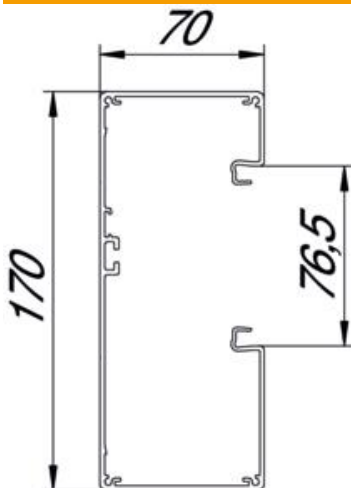

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 170 mm   |
| Height | 70 mm    |

## Technical data

|                                   |                          |
|-----------------------------------|--------------------------|
| Number of covers                  | 1                        |
| Number of insertable partitions   | 1                        |
| Rear panel version (inner side)   | Continuous C profile     |
| Rectangular shape                 | yes                      |
| Base perforation                  | Without base perforation |
| Halogen-free                      | yes                      |
| Cable retaining clip              | no                       |
| Duct connector                    | no                       |
| Cover mounting type               | Internal                 |
| Mounting perforation in base      | no                       |
| Usable cross-section              | 8620 mm <sup>2</sup>     |
| Cover supplied                    | no                       |
| Cover width                       | 76.5 mm                  |
| Protection rating                 | IP30                     |
| Protective film                   | yes                      |
| Protection rating IK code         | IK10                     |
| Symmetrical                       | no                       |
| Permitted temperature range, max. | 60 °C                    |
| Permitted temperature range, min. | -25 °C                   |