

Technical data sheet

Trunking cover, aluminium, 100 mm

Item number: 6279715



Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 2 pre-mounted locking brackets included per delivery length (100 mm).



Alu Aluminium

Master data

| | |
|------------------------------------|-------------------------|
| Item number | 6279715 |
| Type | GA-OTRW 100 |
| Description 1 | Cover |
| Manufacturer | OBO |
| Dimension | 12x76,5x100 |
| Colour | Pure white; RAL 9010 |
| Material | Aluminium |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 3.83 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,569 kg CO2e / 1 Piece |


Technical data sheet

Trunking cover, aluminium, 100 mm

Item number: 6279715



Dimensions

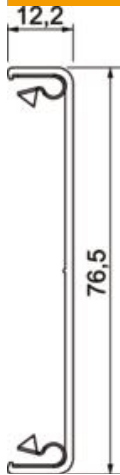

| | |
|--------|---------|
| Length | 100 mm |
| Width | 76.5 mm |
| Height | 12 mm |

Technical data

| | |
|-----------------------------------|----------|
| Version for | Smooth |
| Halogen-free | yes |
| Cover mounting type | Internal |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |