

Technical data sheet

Support plate 3 x type A for mounting support

Item number: 7407820



Support plate to accept three data connection modules of the following types:
AMP TYCO: SL series 110Connect and Toolless, AMP-Twist; Brand-Rex: uns-
hielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter Clip.
Dimensions of a mounting opening in mm: 20.10 x 14.80.




A2 Stainless steel

Master data

| | |
|------------------------------------|-----------------------------|
| Item number | 7407820 |
| Type | MTM 3A |
| Description 1 | Support plate |
| Description 2 | with 3x hole pattern Type A |
| Manufacturer | OBO |
| Material | Stainless steel 1.4301 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 3.32 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2969 kg CO2e / 1 Piece |

Dimensions

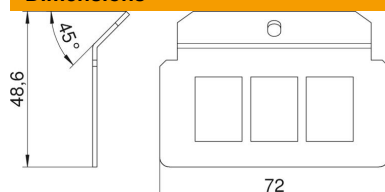

| | |
|--------|-------|
| Length | 72 mm |
|--------|-------|

Technical data sheet

Support plate 3 x type A for mounting support

Item number: 7407820



Technical data

| | |
|---|--|
| Connection options | 3 data connection modules of the following types: AMP TYCO: SL series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter Clip |
| Number of installable devices | 3 |
| Number of strain reliefs | 0 |
| Version for | Support shape |
| Fastening type | Lockable |
| Labelling panel | no |
| Floor covering protection frame | no |
| Floor plate | no |
| Lowerable to be flush-floor | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |
| With floor covering recess | no |
| Heavy-duty version | no |
| Depth | 48.6 mm |
| Strain relief option | yes |