

# Technical data sheet


## Wiring set for V10 – Mini

Item number: 5089657



### Wiring set

- For the simple and fast connection of the surge arrester V10-3+1+FS-M
- 5-wire version (L1; L2; L3; N; PE)
- Cable length: 200 mm
- Cable: H07V-K 6 mm<sup>2</sup>

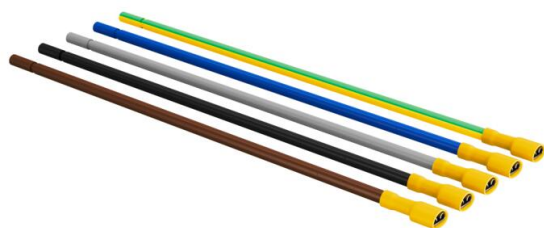

### Master data

|                     |            |
|---------------------|------------|
| Item number         | 5089657    |
| Type                | WS-V10-3+1 |
| Description 1       | Wiring set |
| Manufacturer        | OBO        |
| Smallest sales unit | 1          |
| Unit of quantity    | Piece      |
| Weight              | 7.665 kg   |
| Weight unit         | kg/100 pc. |


# Technical data sheet

## Wiring set for V10 – Mini

Item number: 5089657



### Dimensions

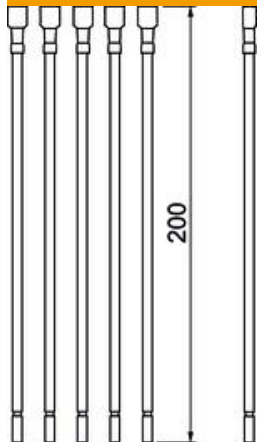

Length 200 mm

### Technical data

|                                                                 |                     |
|-----------------------------------------------------------------|---------------------|
| Pole version                                                    | 3+N/PE              |
| Structural width in division units<br>(division unit, 17.5 mm)  | Miscellaneous       |
| Suitable for outdoor use                                        | no                  |
| Integrated back-up fuse                                         | no                  |
| Conductor cross-section, rigid<br>(single-wire/multiwire), max. | 10 mm <sup>2</sup>  |
| Conductor cross-section, rigid<br>(single-wire/multiwire), min. | 2.5 mm <sup>2</sup> |
| Max. mains-side overcurrent protection                          | 63                  |
| Maximum back-up fuse                                            | 63 A                |
| Network form                                                    | All                 |
| DC network form                                                 | no                  |
| IT network form                                                 | no                  |
| Other network form                                              | no                  |
| TN network form                                                 | yes                 |
| TN-C network form                                               | no                  |
| TN-C-S network form                                             | yes                 |
| TN-S network form                                               | yes                 |
| TT network form                                                 | yes                 |
| Test class, type 2                                              | yes                 |
| Test class, type 3                                              | yes                 |
| ROHS-conformant                                                 | yes                 |
| Protection rating                                               | IP23                |
| SPD to EN 61643-11                                              | Type 2+3            |
| SPD to IEC 61643-11                                             | Class II+III        |
| Permitted temperature range,<br>max.                            | 80 °C               |
| Permitted temperature range,<br>min.                            | -40 °C              |