

Technical data sheet

BKS clamp clip

Item number: 2148846



For cables, flexible pipes and all kinds of insulating and armoured steel pipes, suitable for concrete, calcareous limestone and full brick. Use in gas concrete masonry is possible, but reduced load capacities must be expected.

HALOGEN
FREE

PA Polyamide

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 2148846 |
| Type | 1973 8-28 LGR |
| Description 1 | BKS clamp |
| Manufacturer | OBO |
| Dimension | 8-28mm |
| Colour | Light grey; RAL 7035 |
| Material | Polyamide |
| Smallest sales unit | 100 |
| Unit of quantity | Units |
| Weight | 0,122 kg |
| Weight unit | kg/100 pairs |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0075 kg CO2e / 1 Piece |


Technical data sheet

BKS clamp clip

Item number: 2148846



Dimensions

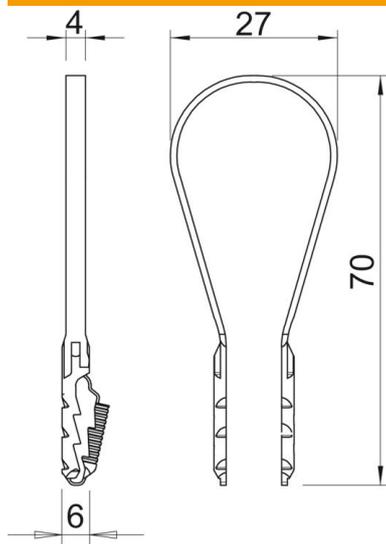

| | |
|-------------|-------|
| Dimension D | 27 mm |
| Dimension L | 70 mm |

Technical specifications

| | |
|---------------------------|----------------|
| Version for | Closed |
| Pull-out value | 500 N |
| Fastening type | Plug fastening |
| Drill hole depth | 65 mm |
| Drill hole diameter, min. | 6 mm |
| Halogen-free | yes |
| Clamping range D, max. | 28 mm |
| Clamping range D, min. | 8 mm |