

Technical data sheet

Connection element for installation in the insulated interception rod isFang IN
Item number: 5408024



- Screw-on termination of the connection for the isCon® cable
- Connection and installation of the cable in the insulated interception rod
- Tested up to 150 kA (lightning protection Class II)



A2 Stainless steel

Master data

Item number	5408024
Type	isCon IN connect
Description 1	Connection element
Description 2	For isCon cable, internal
Manufacturer	OBO
Dimension	Ø23mm
Material	Stainless steel, rustproof 1.4301
Smallest sales unit	1
Unit of quantity	Units
Weight	26,9 kg
Weight unit	kg/100 pairs
CO2 Footprint (GWP) Cradle-to-Gate	1,2871 kg CO2e / 1 Piece


Technical data sheet

Connection element for installation in the insulated interception rod isFang IN

Item number: 5408024



Dimensions

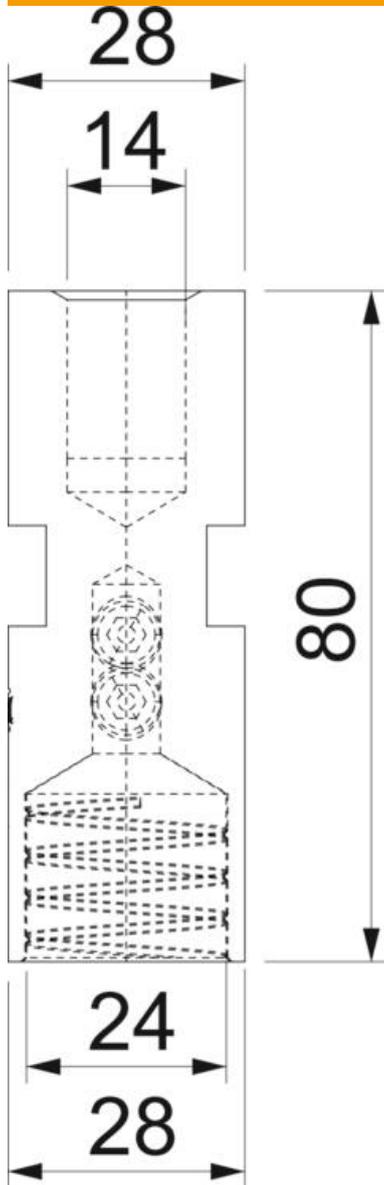

Dimension d min. | 28 mm

Technical specifications

Lightning current carrying capacity	H1/150 kA
Suitable for connection	Miscellaneous
Fit	23 mm
Clamping range, max.	23 mm